


# TIMBERTECH2™ ORIGINAL XTRA QA PERFORMAX™ brand

## PRODUCT DATA SHEET

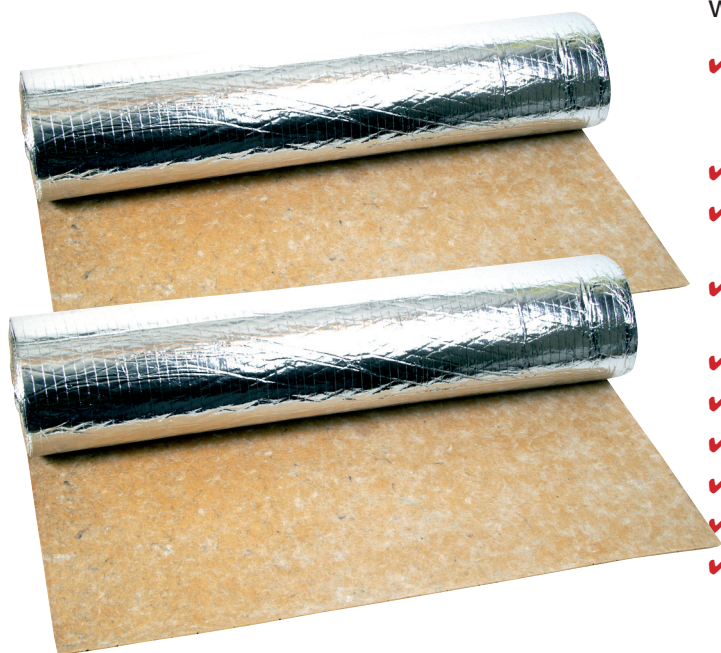

One of the highest quality room acoustic underlays on the market - 3mm thick rubber with a silver vapour barrier film and backing fleece; for laminate, engineered, and solid wood; domestic and contract installations.

- ✓ Laminated with a silver vapour barrier  
- protects against moisture migration from the subfloor
- ✓ Backing fleece on one side
- ✓ Ultra heavy mass stability and enhanced stay-put quality
- ✓ Superior sound energy absorption and performance properties
- ✓ High density
- ✓ Exceptional resistance to compression
- ✓ High tensile strength
- ✓ Thermal insulation
- ✓ Shock insulation
- ✓ Thinner and denser than inferior alternatives  
- keeps the height of the floor to a minimum  
- reduces the risk of flexing laminate joints
- ✓ Takes out unevenness in the subfloor
- ✓ Long term support and protection  
- prolongs the serviceable life of the floor covering
- ✓ Dust free
- ✓ Quick and easy to cut and install

REF	SIZE	THICKNESS
<b>TOX2</b>	<b>1M x 10M (10M<sup>2</sup>)</b>	<b>3mm</b>

Properties	Unit	Value	Test Method
Density	kg/m <sup>3</sup>	950 ± 50	internal
Weight per square metre	kg/m <sup>2</sup>	2.8 ± 0.28	internal
Impact sound reduction	dB	≅ 20	BS EN ISO 717-2
Thermal Conductivity measured at 10°C	W/m k	0.036	DIN 4108
Thermal Resistance	m <sup>2</sup> k/W	0.08-0.16	DIN 4108
Maximum Compression Load	kN/m <sup>2</sup>	2-5	DIN EN 1606

MORE CHOICE. MORE ADDED-VALUE. MORE CUSTOMER-FRIENDLY  
*- that's QA for you!*

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.